


# BAT-LEAD-12V7AH-WL

COD PRODUCATOR	BAT-LEAD-12V7AH-WL
LUNGIME	151 MM
LATIME	65 MM
INALTIME	95 MM
GREUTATE	2 KG

	VOLTAJ NOMINAL	12V
	CAPACITATE NOMINALA	7AH
TIP TERMINAL	TERMINAL STANDARD	F1
MATERIAL CARCASA		ABS
CURRENT MAXIM DESCARCARE		-
CARACTERISTICI DESCARCARE	TEMPERATURI OPERARE	DESCARCARE: -15 ~ 50 C INCARCARE: 0 ~ 40 C PASTRARE: -15 ~ 40 C
	CICLU	14.4V ~ 15.0V LA 25 C
	STAND-BY	13.5V ~ 13.8V LA 25 C
	CAPACITATEA IN FUNCTIE DE TEMPERATURA	40 C – 102% 25 C – 100% 0 C – 85%

BATERIILE WELL SE POT PASTRA MAXIM 6 LUNI LA O TEMPERATURA DE 25 DE GRADE. DUPA ACEEA, O INCARCARE ESTE NECESARA, PENTRU IMPROSPATARE. PENTRU PASTRAREA LA TEMPERATURI MAI RIDICATE, ACEST INTERVAL O SA FIE MAI SCURT.

## DIMENSIUNI TERMINAL

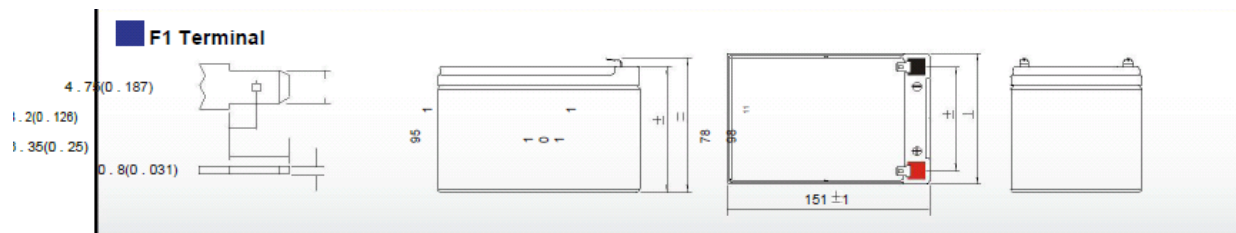

DESCARCARE CURENT CONSTANT (AMPERI) LA 25 DE GRADE

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	19.56	14.37	10.34	6.86	4.05	2.28	1.72	1.35	1.15	0.92	0.67	0.35
1.80V/Cell	19.94	14.65	10.54	7.00	4.13	2.33	1.75	1.38	1.17	0.94	0.68	0.35
1.75V/Cell	20.32	14.93	10.74	7.13	4.21	2.37	1.79	1.41	1.20	0.96	0.69	0.36
1.70V/Cell	22.17	15.84	11.41	7.43	4.29	2.42	1.82	1.44	1.22	0.98	0.71	0.37
1.67V/Cell	24.44	17.21	12.40	7.86	4.34	2.44	1.84	1.45	1.23	0.99	0.71	0.37
1.60V/Cell	26.50	18.13	13.06	8.21	4.38	2.47	1.86	1.47	1.25	1.00	0.72	0.37

DESCARCARE PUTERE CONSTANTA (WATT) LA 25 DE GRADE

F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	38.42	28.30	20.44	13.66	8.00	4.54	3.45	2.73	2.33	1.88	1.30	0.68
1.80V/Cell	39.16	28.85	20.84	13.93	8.16	4.63	3.52	2.79	2.38	1.92	1.33	0.69
1.75V/Cell	39.90	29.39	21.23	14.19	8.31	4.72	3.58	2.84	2.43	1.96	1.35	0.70
1.70V/Cell	43.52	31.18	22.53	14.77	8.46	4.80	3.65	2.89	2.47	2.00	1.37	0.71
1.67V/Cell	47.94	33.85	24.46	15.61	8.55	4.86	3.69	2.93	2.50	2.02	1.39	0.72
1.60V/Cell	51.96	35.63	25.76	16.30	8.64	4.91	3.73	2.96	2.53	2.04	1.40	0.73