

PrimAX 25-8 180 RED

PrimAX 32-8 180 RED

PrimAX 32-8 170 RED

PrimAX 15-8 130 RED

PrimAX 25-8 130 RED

Nominal width	DN 32 DN 15 DN 25
Max. flow head H	7.5 m
Overall length	180 170 130 mm
Threaded connection	G 2" G 1" G 1 1/2"
Max. operating pressure	10 bar
Min. media temperature	+ 2°C
Max. media temperature	+110°C
Ambient temperature	0°C bis 40°C
Net weight	1.8 kg
Gross weight	2 kg


Electrical data

Voltage	1x230 V
Frequency	50/60 Hz
Power P _i	3-50 W
Nominal current	0.03-0.41 A
Motor protection	integrated

Required operating pressure at 500m a.s.l.

at a water temp. of 75 °C	0.05 bar
at a water temp. of 90 °C	0.28 bar
at a water temp. of 110 °C	1.08 bar
for every ±100 m of altitude	0.01 bar

Connction diagram




L, N, PE Power supply

Included in the scope of delivery

- Heat insulation shell
- Biral Connector and angled connector
- AFM seal

Type	Art. no.
PrimAX 25-8 180 RED	2205390150
PrimAX 32-8 180 RED	2205470150
PrimAX 32-8 170 RED	2205430150
PrimAX 15-8 130 RED	2205310150
PrimAX 25-8 130 RED	2205350150

PrimAX 25-8 180 RED DN 25 L = 180 mm G = 1 1/2"	PrimAX 32-8 180 RED DN 32 L = 180 mm G = 2"
PrimAX 32-8 170 RED DN 32 L = 170 mm G = 2"	PrimAX 15-8 130 RED DN 15 L = 130 mm G = 1"
PrimAX 25-8 130 RED DN 25 L = 130 mm G = 1 1/2"	

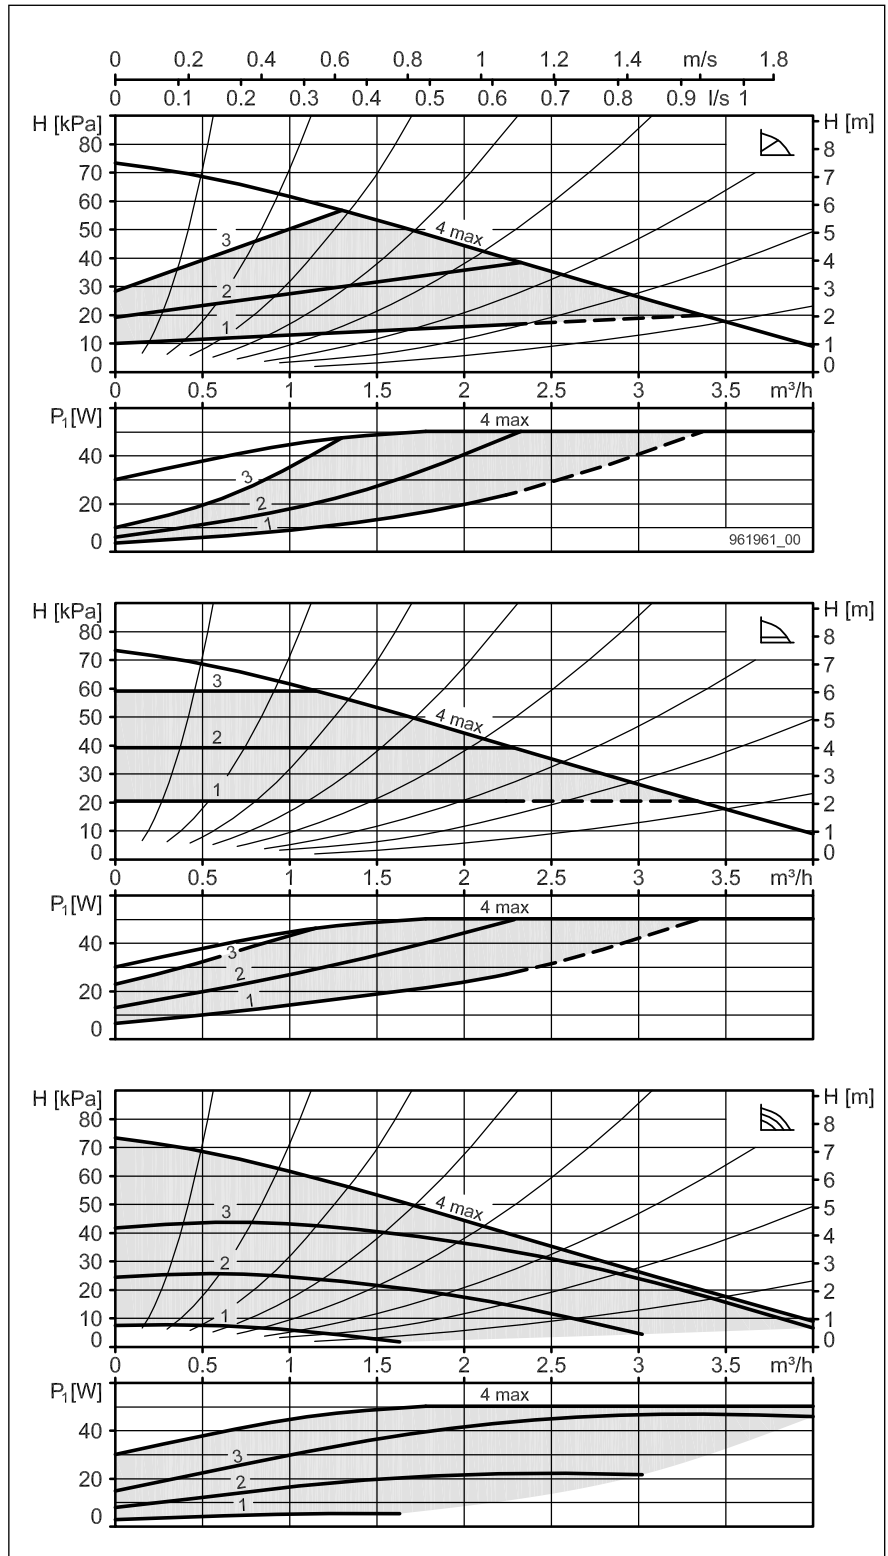

Heating