


Filling push cart with a powerful pump designed for professional filling and air venting of sealed systems like solar thermal systems, floor and wall heating circuits.

CODE – 9561

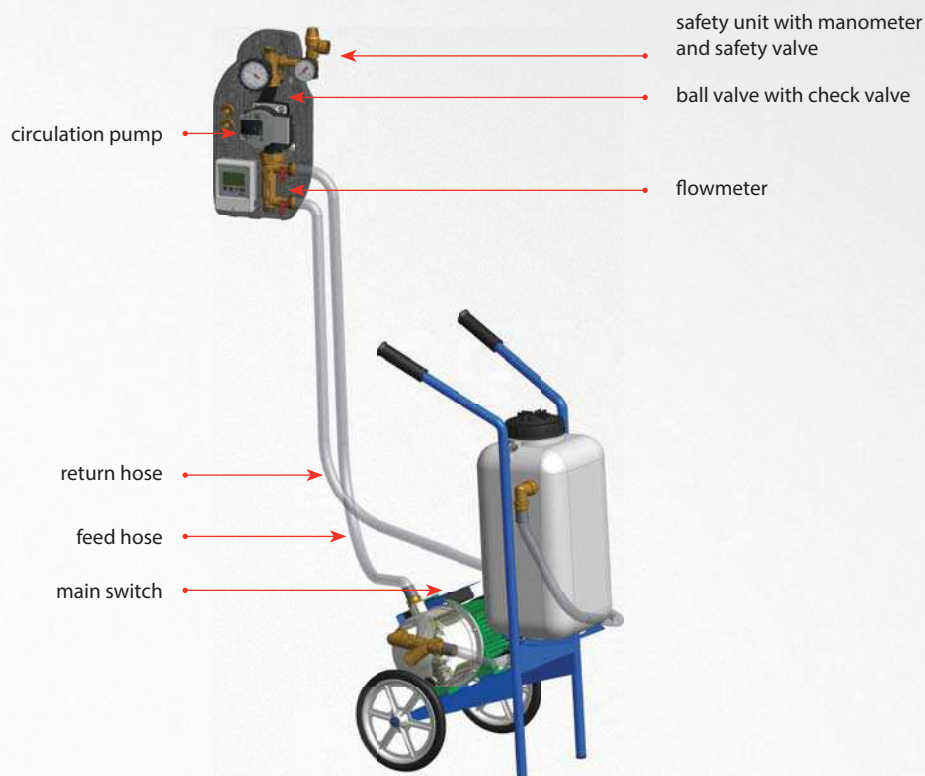

Advantages

- ✓ powerful pump - 1.1 kW power input, 60 l/min. max. flow rate, 5 bar max. working pressure
- ✓ pump housing in stainless steel
- ✓ splashproof switch
- ✓ maintenance-free pump with a start capacitor and protection against heat overload
- ✓ transparent pressure hoses for visual check
- ✓ ball valves at the hose ends for clean and safe connection to a solar pump station
- ✓ strainer to remove impurities

Technical Data

Electric motor	230 V / 1.1 kW
IP protection	IP44
Max. head	50 m
Max. flow rate	60 l/min
Max. pressure	5 bar
Max. suction height	9 m
Max. fluid temperature	35 °C
Power supply cable	1.5 m
Empty weight	16 kg