

**CompAX 25-6 180 RED**

**CompAX 32-6 180 RED**

**CompAX 15-6 130 RED**

**CompAX 25-6 130 RED**

Nominal width	DN 32   DN 15   DN 25
Flow head H max.	6 m
Overall length	180   130 mm
Threaded connection	G 2"   G 1"   G 1 1/2"
Operating pressure max.	10 bar
Media temperature min.	+ 2°C
Media temperature max.	+110°C
Ambient temperature	0°C bis 40°C
Net weight	2.0   2.2   1.7   1.8 kg
Gross weight	2.2   2.4   1.9   2.0 kg


**Electrical data**

Voltage	1x230 V
Frequency	50/60 Hz
Power P <sub>1</sub>	4-35 W
Nominal current	0.04-0.30 A
Motor protection	integriert

**Required operating pressure at 500m a.s.l.**

at a water temp. of 75 °C	0.05 bar
at a water temp. of 90 °C	0.28 bar
at a water temp. of 110 °C	1.08 bar
for every ±100 m of altitude	0.01 bar

**Connction diagram**



**L, N, PE** Netzanschluss

**Included in the scope of delivery**




- Heat insulation shell
- Biral Connector
- AFM seal

**Accessories**

- Angle plug

Type	Art. no.
CompAX 25-6 180 RED	7000001502
CompAX 32-6 180 RED	7000001505
CompAX 15-6 130 RED	7000001508
CompAX 25-6 130 RED	7000001510

<b>CompAX 25-6 180 RED</b>	<b>CompAX 32-6 180 RED</b>
DN 25	DN 32
L = 180 mm	L = 180 mm
G = 1 1/2"	G = 2"
<b>CompAX 15-6 130 RED</b>	<b>CompAX 25-6 130 RED</b>
DN 15	DN 25
L = 130 mm	L = 130 mm
G = 1"	G = 1 1/2"

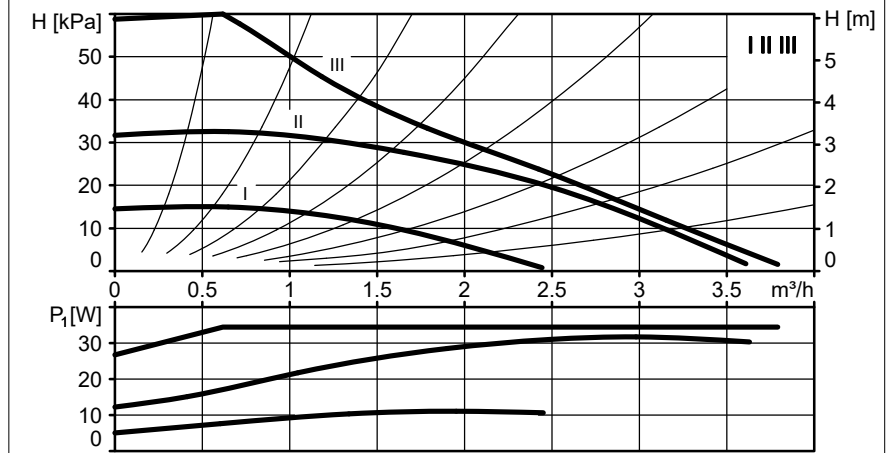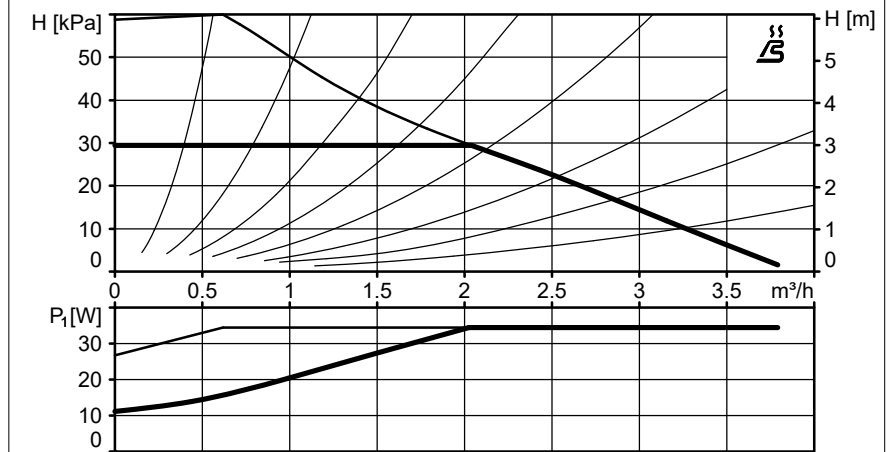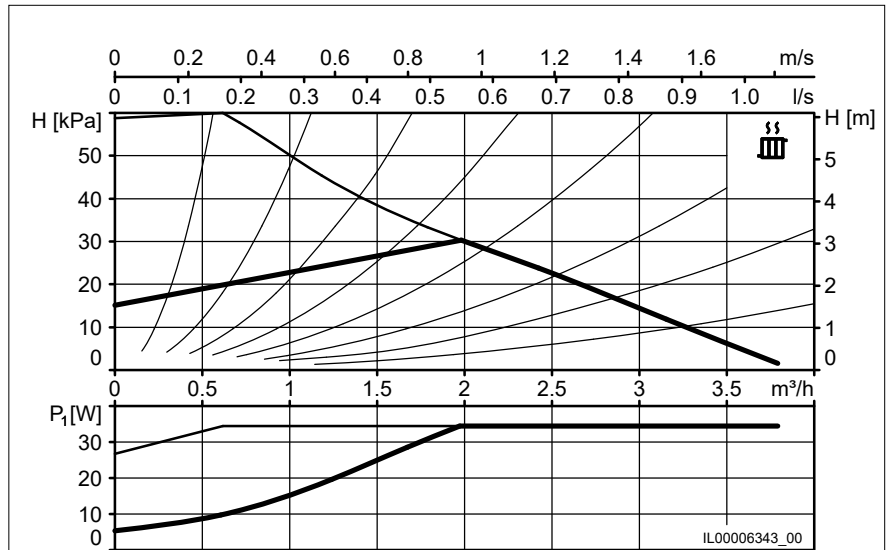

Heizung